




Koehler NexCoat® M

Preliminary product data sheet

Layer:

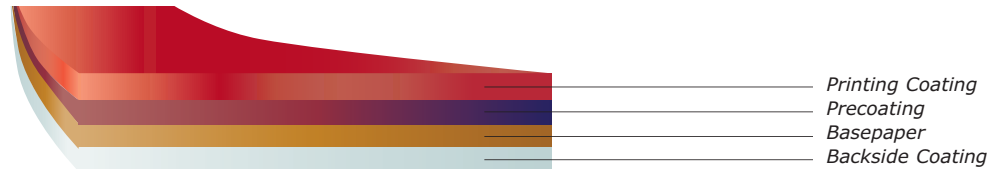

Description: One-side double coated glossy paper with reverse side treatment

Application: Basepaper for metallization

Format: Reel

- Features & Benefits:
- High whiteness
 - Without OBA
 - High gloss level
 - High smoothness
 - Suitable for metallization, lamination and printing
 - High flex-crack resistance
 - Suitable for direct contact with food stuff
 - Good lay flat properties
 - High dimension stability
 - Excellent printing results
 - Excellent runability
 - Excellent lacquer holdout

Printing: Especially suitable for rotogravure and flexo printing

Product specifications:

	Standard	Unit		
Substance	ISO 536	gsm	80	90
Thickness	ISO 534	µm	72	79
Opacity	ISO 2471	%	86	87
Gloss Tappi 75°	ISO 8254-1	%	85	85
Tensile Strength	MD	ISO 1924-1	N/15 mm	≥ 72
	CD	ISO 1924-1	N/15 mm	≥ 41
				≥ 84
				≥ 47

Technical values are informative and subject to production variations. Responsibility for testing the suitability of the product for specific application lies with the purchaser.

Planned certificates: BfR Food Certificate, FDA Food Certificate, FSC® Chain-of-Custody, ISO 14001, ISO 9001, ISO 22000