


SCHWARZ 1/s

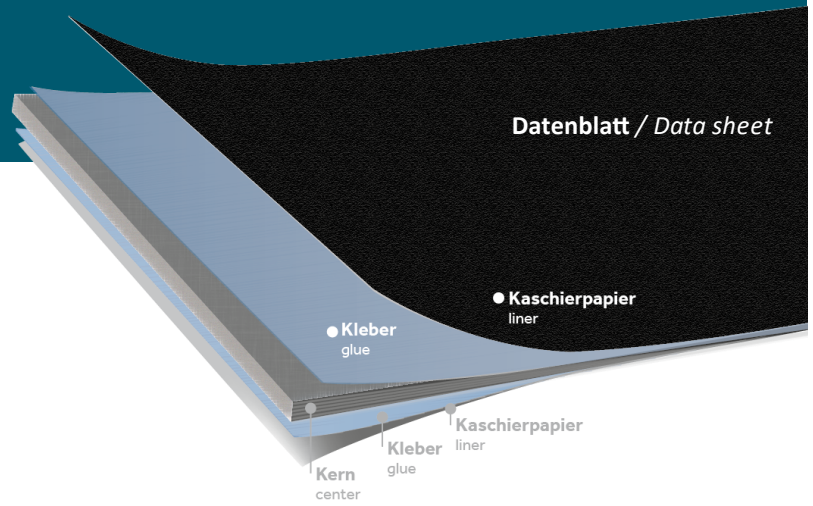

BLACK 1/S

NEGRO 1/C

NOIR 1/C

TECHNISCHE WERTE | TECHNICAL FIGURES

DICKE / Thickness (mm)	Flächengewicht Substance (g/m ²)	Biegesteifigkeit längs Bending Stiffness longitudinal (mNm)	Biegesteifigkeit quer Bending Stiffness transverse (mNm)	Berstdruck Burst pressure (kPa)
1,0	650	360	170	720
1,1	715	490	270	800
1,2	780	520	290	860
1,3	845	765	390	880
1,4	910	830	440	900
1,5	975	890	470	1000
1,6	1040	950	510	1070
1,7	1105	1520	740	1100
1,8	1170	1700	800	1140
1,9	1235	1960	1010	1180
2,0	1300	2110	1080	1200

	Einheit / unit of measurement	Wert / value	Toleranzen / tolerances	Testmethode / testing method
Stärke / caliper	mm		+/- 5 %	ISO 534
Format / size	Formate / Zuschnitte cm / mm Large sheets / rotary cut pieces cm / mm		+/- 1,0 mm / +/- 0,25 mm	
Feuchte / humidity	%	8,0	+/- 1,5 %	ISO 287

PRÜFKLIMA | TESTING CLIMATE 50% RH, 23°

Smurfit Kappa

Änderungen vorbehalten, Stand 08.2020/
subject to change, date of issue 2020-08

SOLID BOARD | ANSPRECHPARTNER | CONTACT

Smurfit Kappa Wrexen Paper & Board GmbH
Orpethaler Str.50 | DE-34474 Diemelstadt
Tel: + 49 (0) 564 279-0 | Mail: sales.board.wrexen@smurfitkappa.de