


SCHWARZ 2/s

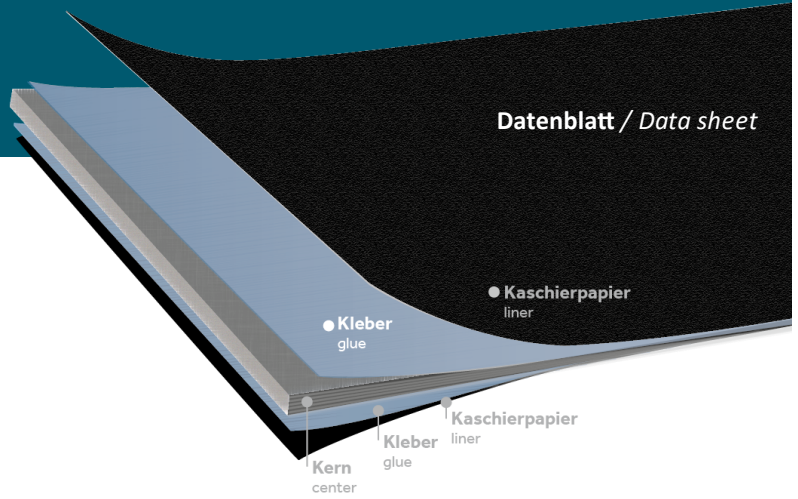

BLACK 2/S

NEGRO 2/C

NOIR 2/C

TECHNISCHE WERTE | TECHNICAL FIGURES

DICKE / Thickness (mm)	Flächengewicht Substance (g/m ²)	Biegesteifigkeit längs Bending Stiffness longitudinal (mNm)	Biegesteifigkeit quer Bending Stiffness transverse (mNm)	Berstdruck Burst pressure (kPa)
1,0	670	400	220	740
1,1	735	540	240	790
1,2	805	600	270	810
1,3	870	700	360	830
1,4	940	810	400	850
1,5	1005	890	480	900
1,6	1070	950	550	980
1,7	1140	1500	800	1050
1,8	1205	1750	950	1150
1,9	1275	1830	1000	1170
2,0	1340	2100	1050	1200

	Einheit / unit of measurement	Wert / value	Toleranzen / tolerances	Testmethode / testing method
Stärke / caliper	mm		+/- 5 %	ISO 534
Format / size	Formate / Zuschnitte cm / mm Large sheets / rotary cut pieces cm / mm		+/- 1,0 mm / +/- 0,25 mm	
Feuchte / humidity	%	8,0	+/- 1,5 %	ISO 287

PRÜFKLIMA | TESTING CLIMATE 50% RH, 23°



Änderungen vorbehalten, Stand 08.2020/
subject to change, date of issue 2020-08

SOLID BOARD | ANSPRECHPARTNER | CONTACT

Smurfit Kappa Wrexen Paper & Board GmbH
Orpethaler Str.50 | DE-34474 Diemelstadt
Tel: + 49 (0) 564 279-0 | Mail: sales.board.wrexen@smurfitkappa.de