


SOLID BLACK BOARD schwarz durchgefärbt

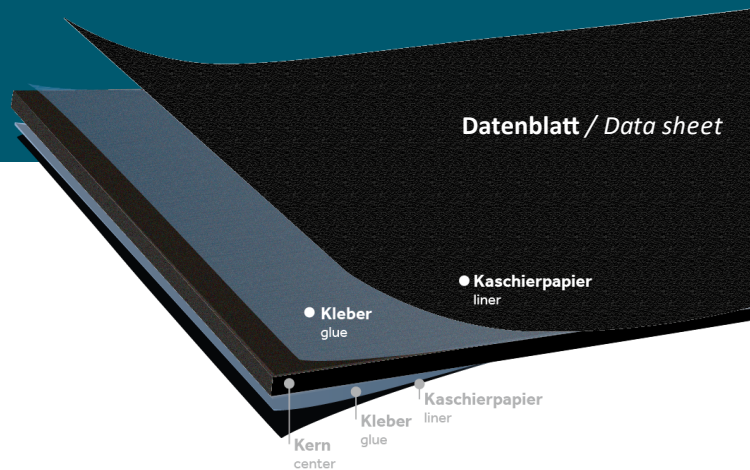

SOLID BLACK BOARD PASTED

SOLID BLACK BOARD SATINADO

SOLID BLACK BOARD REDOUBLÉ

TECHNISCHE WERTE | TECHNICAL FIGURES

| DICKE / Thickness (mm) | Flächengewicht Substance (g/m ²) | Biegesteifigkeit längs Bending Stiffness longitudinal (mNm) | Biegesteifigkeit quer Bending Stiffness transverse (mNm) | Berstdruck Burst pressure (kPa) |
|------------------------|--|---|--|---------------------------------------|
| 1,00 | 670 | 400 | 190 | 1160 |
| 1,25 | 840 | 650 | 300 | 1160 |
| 1,50 | 1005 | 1000 | 480 | 1450 |
| 1,75 | 1175 | 1850 | 780 | 1550 |
| 2,00 | 1340 | 2800 | 1200 | 1750 |

| | Einheit / unit of measurement | Wert / value | Toleranzen / tolerances | Testmethode / testing method |
|--------------------|--|--------------|--------------------------|------------------------------|
| Stärke / caliper | mm | | +/- 5 % | ISO 534 |
| Format / size | Formate / Zuschnitte cm / mm Large sheets / rotary cut pieces cm / mm | | +/- 1,0 mm / +/- 0,25 mm | |
| Feuchte / humidity | % | 8,0 | +/- 1,5 % | ISO 287 |

PRÜFKLIMA | TESTING CLIMATE 50% RH, 23°

Smurfit Kappa

Änderungen vorbehalten, Stand 03.2021
subject to change, date of issue 2021.03

SOLID BOARD | ANSPRECHPARTNER | CONTACT

Smurfit Kappa Wrexen Paper & Board GmbH
Orpethaler Str.50 | DE-34474 Diemelstadt
Tel: + 49 (0) 564 279-0 | Mail: sales.board.wrexen@smurfitkappa.de